


태경연주

한스바 환봉 표준사이즈

HANSBAR ROUNDS SPEC. SHEET

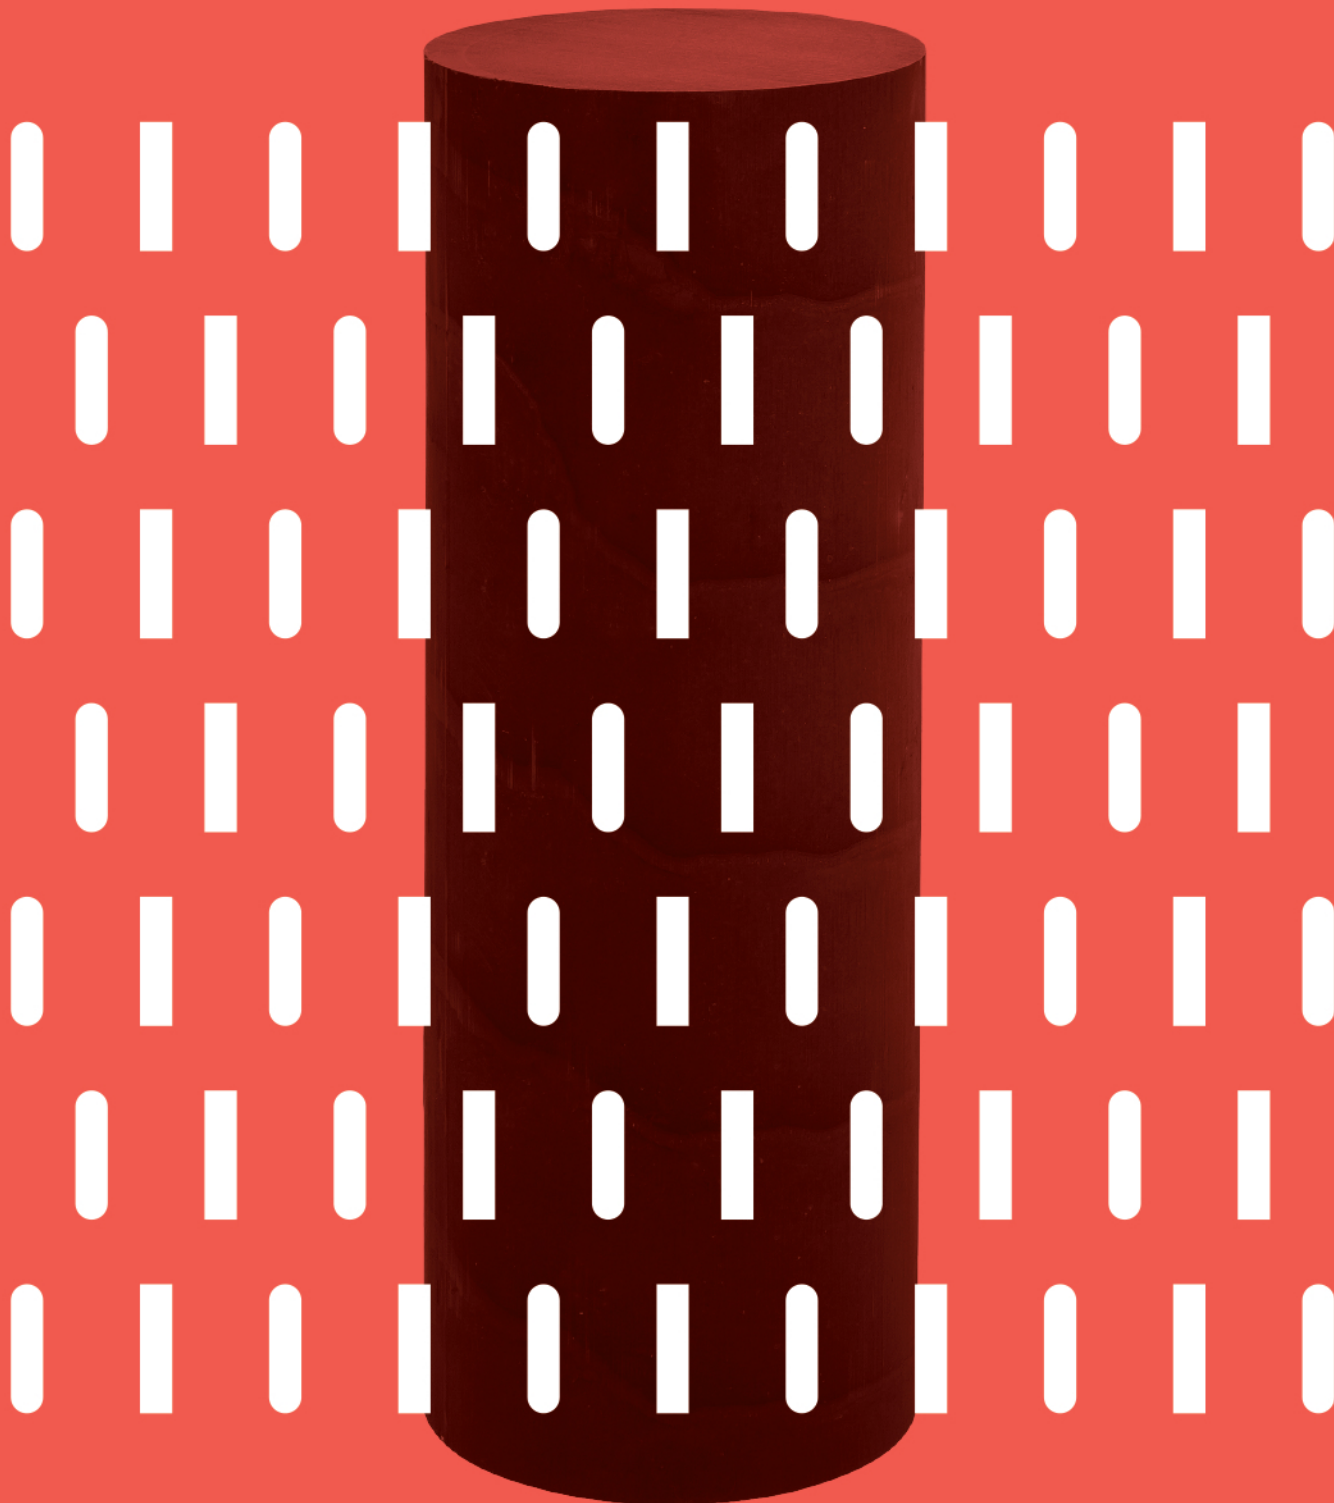

HANSBAR

YES, IT'S HERE. IT'S HANSBAR.

직경 (mm)	품명	재질	단위 길이당 중량 (kg/m)	면당 가공여유 (mm)	
				회주철	구상흑연주철
25	H2	GC250	3.5	2	
30	H2, HD5	GC250, GCD500	5.1	2	
35	H2	GC250	6.9	2	
40	H2, HD5	GC250, GCD500	9	2	
45	H2, HD5	GC250, GCD500	11.4	2	
50	H2	GC250	14.1	2	
55	H2, HD5	GC250, GCD500	17.1	2	
60	H2, HD5	GC250, GCD500	20.3	2	2.5
65	H2, HD5	GC250, GCD500	23.9	2	2.5
70	H2, HD5	GC250, GCD500	27.7	2	2.5
75	H2, HD5, HD6	GC250, GCD500, GCD600	31.8	2	2.5
80	H2, HD5, HD6	GC250, GCD500, GCD600	36.2	2.5	3
85	H2, HD5, HD6	GC250, GCD500, GCD600	40.8	2.5	3
90	H2, HD5, HD6	GC250, GCD500, GCD600	45.8	2.5	3
95	H2, HD5, HD6	GC250, GCD500, GCD600	51	2.5	3
100	H2, HD5, HD6	GC250, GCD500, GCD600	56.5	2.5	3
110	H2, HD5, HD6	GC250, GCD500, GCD600	68.4	3	4
115	HD5, HD6	GCD500, GCD600	74.7		4
120	H2, HD5, HD6	GC250, GCD500, GCD600	81.4	3	4
126.5	H3	GC300	90.4	3	
130	H2, HD5, HD6	GC250, GCD500, GCD600	95.5	3	4
140	H2, HD5, HD6	GC250, GCD500, GCD600	110.8	3	4
150	H2, HD5, HD6	GC250, GCD500, GCD600	127.2	3	4
151.5	H3	GC300	129.7	3	
160	H2, HD5, HD6	GC250, GCD500, GCD600	144.7	4	5
170	H2, HD5, HD6	GC250, GCD500, GCD600	163.3	4	5
180	H2, HD5, HD6	GC250, GCD500, GCD600	183.1	4	5
190	H2, HD5, HD6	GC250, GCD500, GCD600	204	4	5

직경 (mm)	품명	재질	단위 길이당 중량 (kg/m)	면당 가공여유 (mm)	
				회주철	구상흑연주철
200	H2, HD5	GC250, GCD500	226.1	4	5
210	H2, HD5, HD6	GC250, GCD500, GCD600	249.3	5	6
220	H2, HD5	GC250, GCD500	273.6	5	6
230	H2, HD5	GC250, GCD500	299	5	6
240	H2, HD5	GC250, GCD500	325.6	5	6
250	H2, HD5	GC250, GCD500	353.3	5	6
260	H2, HD5	GC250, GCD500	382.1	5	6

• 위 표준규격 외 사이즈에 대해서는 문의 바랍니다.

금형품

직경 (mm)	품명	재질	단위 길이당 중량 (kg/m)	면당 가공여유 (mm)		최대길이 (mm)
				회주철	구상흑연주철	
270	H2M, HD5M	GC250, GCD500	412	2.5	2.5	1000
280	H2M, HD5M	GC250, GCD500	443.1	2.5	2.5	1000
290	H2M, HD5M	GC250, GCD500	475.3	2.5	2.5	1000
300	H2M, HD5M	GC250, GCD500	508.7	2.5	2.5	1000
310	H2M, HD5M	GC250, GCD500	543.2	2.5	2.5	1000
320	H2M, HD5M	GC250, GCD500	578.8	2.5	2.5	1000
330	H2M, HD5M	GC250, GCD500	615.5	2.5	2.5	1000
340	H2M, HD5M	GC250, GCD500	653.4	2.5	2.5	1000
350	H2M, HD5M	GC250, GCD500	692.4	2.5	2.5	1000
360	H2M, HD5M	GC250, GCD500	732.5	2.5	2.5	1000
370	H2M, HD5M	GC250, GCD500	773.8	2.5	2.5	1000
380	H2M, HD5M	GC250, GCD500	816.1	2.5	2.5	1000
390	H2M, HD5M	GC250, GCD500	859.7	2.5	2.5	1000
400	H2M, HD5M	GC250, GCD500	904.3	2.5	2.5	1000
410	H2M, HD5M	GC250, GCD500	950.1	2.5	2.5	1000
420	H2M, HD5M	GC250, GCD500	997	2.5	2.5	1000
430	H2M, HD5M	GC250, GCD500	1045.1	2.5	2.5	1000
440	H2M, HD5M	GC250, GCD500	1094.2	2.5	2.5	1000
450	H2M, HD5M	GC250, GCD500	1144.5	2.5	2.5	1000
460	H2M, HD5M	GC250, GCD500	1196	2.5	2.5	1000
470	H2M, HD5M	GC250, GCD500	1248.5	2.5	2.5	1000
480	H2M, HD5M	GC250, GCD500	1302.2	2.5	2.5	1000
490	H2M, HD5M	GC250, GCD500	1357.0	2.5	2.5	1000
500	H2M, HD5M	GC250, GCD500	1413.0	2.5	2.5	1000
510	H2M, HD5M	GC250, GCD500	1470.0	2.5	2.5	1000

• 위 표준규격 외 재질 및 사이즈에 대해서는 문의 바랍니다.